



SPECIFICATION FOR APPROVAL



Customer : _____
Products Name : LED VEER DOWNLIGHT
Our Model : LUM-DL6H06-16WDIM
Customer model : _____

Approved by :

ECR history

version	issue date	Description of amendment/additional
A		

1. Specification


1-1. Environment

	Spec.			
	unit	Typical	min	max
Storage temp.	(degC)	25	-20	60
Operating temp.	(degC)	25	-20	40
Storage humidity	(%RH)	65%	10%	90%
Operating humidity	(%RH)	65%	10%	90%

1-2. Geometry Property

Dimension & Drawing of products

	Spec.			
	unit	Typical	min	max
Diameter	(mm)	160*160	159*159	161*161
Cut-Out	(mm)	150*150	145*145	155*155
MOL	(mm)	34.5	34	35
Weight	(g)	450	430	470
Base				

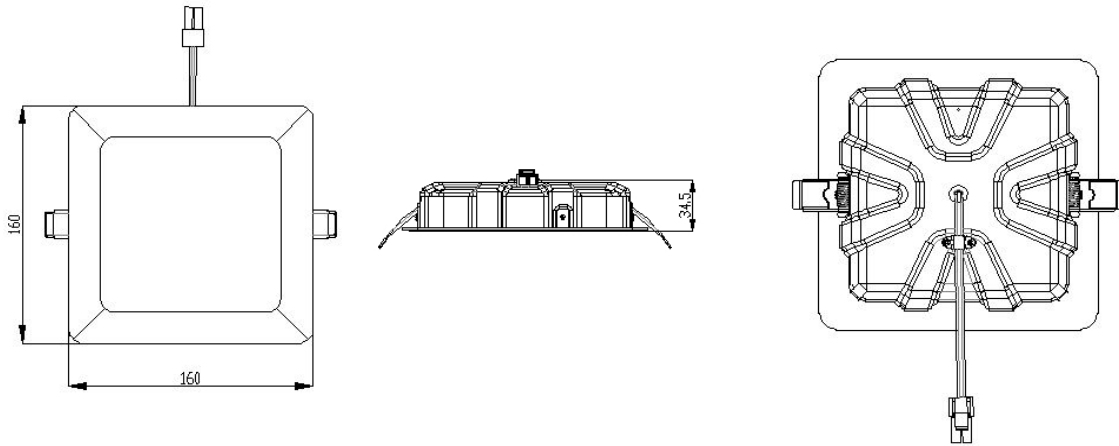

1-3. Electrical Performance

	spec			
	unit	Typical	min	max
Consumption Power	(w)	16	14.4	17.6
Input Voltage	(v)	230	220	240
Input Current	(mA)	76	68	84
Power Factor			0.9	
Frequency	(Hz)		50/60	
Starting time * for EU	(sec)		0.5	

1-4. LED Chip/Package information LED

LED Vender	REFOND/SINOTRON/CEC
model no.	2835
Number of LED per board	72

1-5. Photometric Performance


	unit	Spec.			
		Typical			
Color Temp.	(k)	3000	4000	5000	6500
luminous flux (90deg cone) * for EU directional lamp	(lm)				
total Luminous flux	(lm)	1200	1280	1280	1280
CBCP	(cd)	530	550	550	550
CRI(Ra)	700	≥80			
Beam Angle	(deg)	100			
Efficiency	(lm/w)	75	80	80	80
Dimming		YES			

Tolerance ± 6 %

1-6. Lifespan

Lifetime(L70) at 25deg	(hours)	40000	(25°C) test
Switching Cycle	(times)	20000	no 30s off 60s

1-7. Light Distribution data / LED's Spectrum wave form

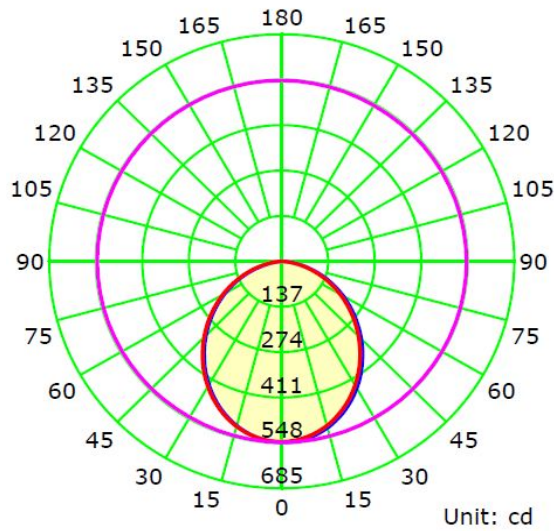

1-8. work in special fixture

enclosed (sealed) fixtures	(OK or N/A)	N/A
thermal-insulation fixtures	(OK or N/A)	N/A

1-9. compatibility for switch with indicator (Firefly switch)

compatible	(OK or N/A)	OK
------------	-------------	----

(330kΩ) for ~120V, (750kΩ) for ~230V, Pana_FireFlySW x 2-parallel, work properly ~ for JPN. * N/A- lamp w/transformer

2. Regulation Certification
on the way

3.Pallatizing (drawing)

	Length (mm)	Width (mm)	Height (mm)	Weight (g)
giftbox	235	210	50	
Outer carton	495	440	320	
Unit weight with lamp				
Carton weight with full lamps inside				

(For example) Package configuration

